

## Key Features

SuperColor: Amazing Color Accuracy | 3,600


Lumen Brightness | Energy Efficient SuperEco |

Reduced Input Latency



## Product Description

The ViewSonic PA503X price-performance projector features 3,600 lumens, native XGA 1024 x 768 resolution, and intuitive, user-friendly design. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. The PA503X also features extensive connectivity including HDMI, 2 x VGA, VGA out, Composite Video and audio in/out. An energy-saving SuperEco® feature reduces power consumption and extends the lamp life by up to 15,000 hours. With advanced audio-visual features, flexible connectivity options, and an affordable price, the PA503X is ideal for use in education and small business environments.

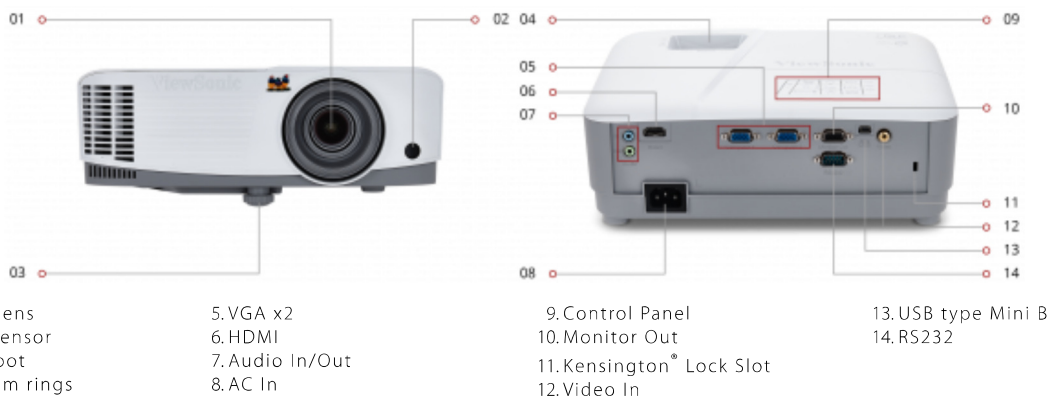


1. Projection lens  
2. IR remote sensor  
3. Elevation foot  
4. Focus / zoom rings

5. VGA x2  
6. HDMI  
7. Audio In/Out  
8. AC In

9. Control Panel  
10. Monitor Out  
11. Kensington® Lock Slot  
12. Video In


13. USB type Mini B  
14. RS232



1024 x 768  
**RESOLUTION**



3,600  
**LUMENS**



1.96 ~ 2.15  
**THROW RATIO**

### Contact Sales

- call: 888.881.8781
- email: [salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)
- visit: [viewsonic.com](http://viewsonic.com)

**Display:**

Type:	DLP
Resolution Type:	XGA
Resolution:	1024 x 768
Brightness (ANSI Lumens):	3,600
Throw Distance:	3.9 ft - 43 ft (100" @13 ft)
Throw Ratio:	1.96 ~ 2.15
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Keystone:	Vertical ( $\pm$ 40°)
Lens:	1.1x Manual optical zoom / manual optical focus

Light Source (watt):	190
Light Source Life, Normal (hours):	4500
Light Source Life, Dynamic Eco-Mode (hours):	15000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	22000:1
Aspect Ratio:	4:3

**Video Signal:**

Frequency Horizontal:	15K~102KHz
Frequency Vertical:	23~120Hz

**Compatibility:**

PC Resolution (max):	VGA (640 x 480) to WUXGA_RB (1920 x 1200)
Mac® Resolution (max):	VGA (640 x 480) to WUXGA_RB (1920 x 1200)

**Connector:**

Mini USB Type B(1), Audio Output (Mini Jack)(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI 1.4(1), VGA Out(1), Composite RCA Video In(1), RGB Input(2)

**Audio:**

Internal Speakers:	2W
--------------------	----

**Power:**

Voltage:	AC 100-240V (universal), 50-60Hz
Consumption (typical):	260W
Stand-by:	<0.5W

**Operating Conditions:**

Temperature:	32-104° F (0-40° C)
--------------	---------------------

**Weight (imperial):**

Net (lbs):	4.89
Gross (lbs):	7.14

**Weight (metric):**

Net (kg):	2.22
Gross (kg):	6.24

**Dimensions (imperial) (WxHxD):**

Packaging (in.):	14.37 x 11.81 x 7.4
Physical (in.):	11.57 x 8.58 x 4.33

**Dimensions (metric) (WxHxD):**

Packaging (mm):	365 x 300 x 188
Physical (mm):	294 x 218 x 110

**General:**

Regulations: FCC (including ICES-003), cTUVus

PACKAGE CONTENTS: PA503X projector, power cable, VGA cable, remote control, Quick Start Guide, ViewSonic Wizard CD (with User Guide)

Warranty: 3-year limited warranty on parts and labor, 1st year free Express Exchange® service\*\*

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907905113

**Accessories:**